

♦ **THOR** er með áratuga reynslu í smíðum með nútíma hönnun ásamt því að hafa mikla varmaleiðni með konvektor. **Thor Standard** kemur í hæðum, 300 - 400 - 500 - 600 - 900 mm. Lengdir eru frá 400 - 3000 mm.

**Ofnatafla**

♦ Umreiknir pr. m.



HÆÐ		Teg. 11	Teg. 21	Teg. 22	Teg. 33
300	Lítrar	2,18	3,50	3,55	5,29
	Kg	7,75	13,28	15,41	23,03
	W/m 70/40/20	328	487	618	869
	<b>W/m 80/40/20</b>	<b>391</b>	<b>564</b>	<b>703</b>	<b>1000</b>
	W/m 75/65/20	523	777	975	1386
400	Lítrar	2,49	4,42	4,47	6,71
	Kg	10,60	17,88	20,98	31,42
	W/m 70/40/20	419	617	781	1105
	<b>W/m 80/40/20</b>	<b>498</b>	<b>711</b>	<b>896</b>	<b>1271</b>
	W/m 75/65/20	666	985	1241	1770
500	Lítrar	2,82	5,33	5,38	8,07
	Kg	13,46	22,58	26,62	39,85
	W/m 70/40/20	504	738	930	1326
	<b>W/m 80/40/20</b>	<b>599</b>	<b>851</b>	<b>1079</b>	<b>1528</b>
	W/m 75/65/20	802	1181	1494	2131
600	Lítrar	3,18	6,22	6,27	9,39
	Kg	16,34	27,38	32,35	48,32
	W/m 70/40/20	587	854	1078	1538
	<b>W/m 80/40/20</b>	<b>697</b>	<b>985</b>	<b>1252</b>	<b>1772</b>
	W/m 75/65/20	932	1368	1738	2472
900	Lítrar	4,42	8,77	8,84	13,02
	Kg	25,06	42,34	50,02	74,02
	W/m 70/40/20	825	1166	1495	2104
	<b>W/m 80/40/20</b>	<b>969</b>	<b>1369</b>	<b>1726</b>	<b>2447</b>
	W/m 75/65/20	1295	1880	2429	3394



♦  $\Delta T-35 = 70/40/20$  ♦  $\Delta T-40 = 80/40/20$  ♦  $\Delta T-50 = 75/65/20$

Framrásarhitastig	°C 80
Bakrásarhitastig	°C 40
Herbergishitastig	°C 20

**L - Festingar**



Hæð ofns	SA
300	105 ±1
400	205 ±1
500	305 ±1
600	405 ±1
900	705 ±1

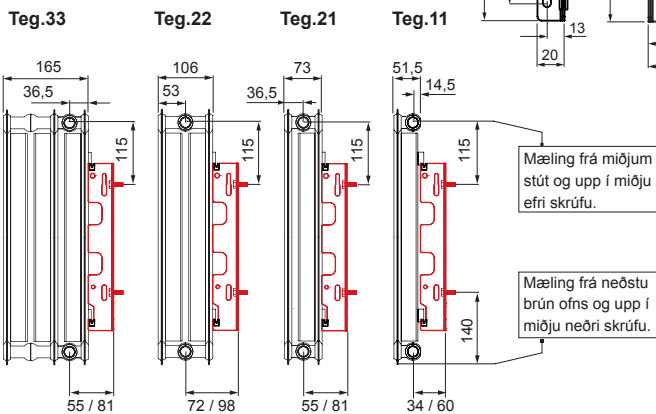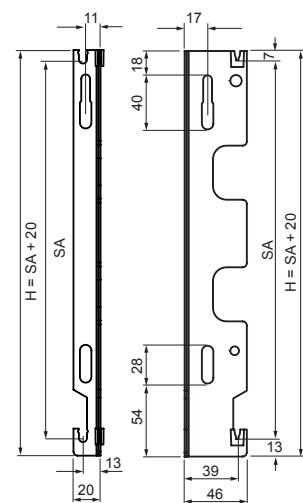

♦ ATH. Allar mælingar á teikningum eru í mm

